





MarksmanMATRIX[™]

High Resolution InkJet Printing







Marksman**MATRIX**

Features and Benefits:



Color Touch Screen - 10" touch screen that features a clear, uncluttered and easy to use interface

Windows Based – allows for easy user interface and easy message creation


Pop-Up Keyboard – appears for editing and message creation and offers larger keys that reduce keying errors by 25%


On Screen 3D Views - featuring your package which allows for enhanced message creation

Standard True Type and Unicode Fonts – pre-loaded so users can begin creating messages

Stainless steel enclosure – provides maximum reliability in harsh environments

Dimensions:

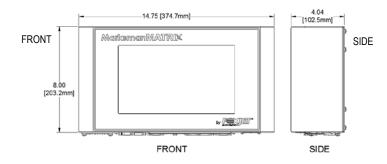



Controller Specifications:

Touch Screen Display Operator Interface

QWERTY Keypad Enclosure

Connectivity Processor

Memory

Data Storage Electrical

Electrical
Operating System
Auto Codes

10.2 inch 1024 x 600 LCD

Graphical User Interface, WYSIWYG Editor

Pop-up on-screen keyboard

Stainless Steel

2GB DDR3-800 SO-DIMM 3 USB, 2 RS232 Serial, Ethernet Intel® Atom™ N2600, 1.6GHz, Dual-Core

64 GB Solid State SATA drive

90-240 VAC, 50/60 Hz, 2.0A max. (power supply input)

Windows® Embedded Standard 7, 32 Bit

Time, Date, Use By, Julian, Count, User, Defined Shift,

Variable Input, Database input

Bar Codes

Logos Fonts

Number of Printheads

Printhead to Controller Environment

Operating Humidity Weight

Code 128, Code 39, Code 93, Data Matrix, GS1 Data Matrix, GS1-128, GTIN-12,

GTIN-13, GTIN-14, GTIN-8 I2of5, UPC-E Monochrome bitmap files only Windows Unicode True Type fonts Up to 4 768 or 384, Max two production lines, heads split in any configuration

Maximum distance 25Ft (7.6 meters) Ambient operation temperature: 40°F to 104°F (5°C to 40°C) 10-90%, non-condensing

8 lbs 13 oz

Distributor Information:



