




PALCO
Industrial Marking and Labeling, Inc.
www.palcosys.com

FOXJET[®]
AN ITW COMPANY




Marksman ELITE

High Resolution InkJet Printing

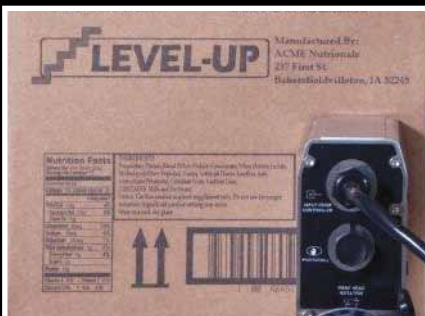

Dimensions:

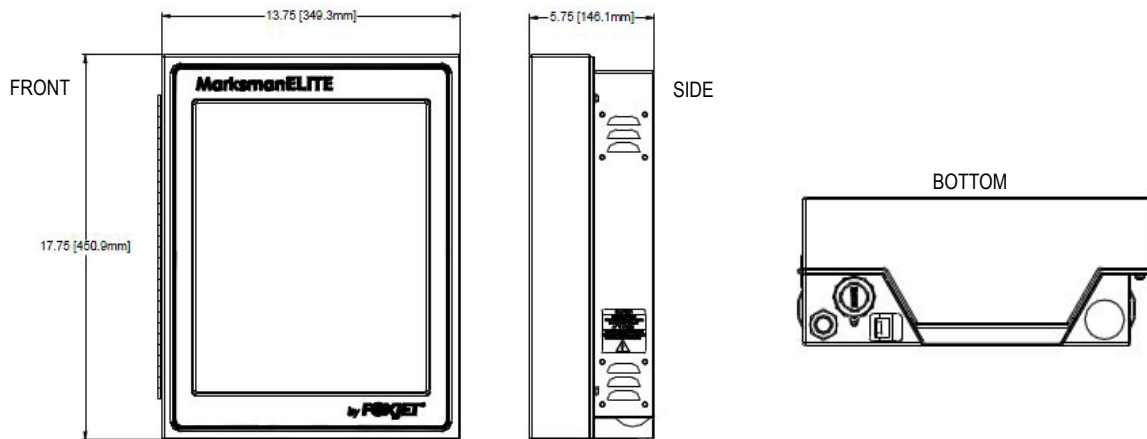

Controller Specifications:

Touch Screen Display	17" Color Touch Screen	Bar Codes	I2of5, UPC A/E, Code 39, C93, 128, Data Matrix
Operator Interface	Graphical User Interface, WYSIWYG Editor	Logos	Monochrome bit map files only
QWERTY Keypad	Sealed Elastomer	Fonts	Windows True Type fonts
Enclosure	Stainless Steel	Number of Printheads	Up to 4 768 or 384, Max two production lines, heads split in any configuration
Memory	2 GB, 200 pin DDR2 SO-DIMM	Printhead to Controller	Maximum distance between printhead and controller is 25 ft (7.6 meters) max
Connectivity	4 USB, 2 RS232 Serial	Environment	Ambient operating temperature: 40° to 104° F (5° to 40° C)
Processor	Intel® Atom™ N2800	Operating Humidity	10-90%, non-condensing
Data Storage	40 GB Solid State SATA drive		
Power Input	100-240VAC, 50-60Hz at 3A max		
Operating System	Windows® Embedded Standard 7		
Auto Codes	Time, Date, Use By, Julian, Count, User Defined Shifts, Variable Input		

Features and Benefits:



Color Touch Screen – 17" color graphical user interface guides users easily through menu functions.

Designed with fewer components - up to 50% less components than previous models maximizing reliability and uptime.

Less Power – utilizing Intel's low power Atom processor and Solid State Disk the Elite consumes a third less power compared to previous models.

Windows Based – allows for easy user interface and easy message creation.

Optional Keyless message selection allows user to easily select message for print.

Distributor Information:

 **PALCO**
Industrial Marking and Labeling, Inc.
www.palcosys.com
11490 South 153rd Street • Omaha, NE 68138
PH: (402) 556-7000 • TF: (800) 255-7252 • FAX: (402) 556-6622